

TOPE 
LIGHTING

WWW.TOPELIGHTING.COM

TOPE LIGHTING CATALOGUE **LED LINEAR LIGHT**

2024



ABOUT US

"Tope Lighting" is a reliable manufacturer and supplier of LED luminaires, known not only in Lithuania, but also in Europe.

Our mission is to develop luminaires and their technologies in order to obtain the best ratio of parameters, quality and price.

We produce lighting solutions for:

- individual houses,
- offices,
- warehouse or factory premises,
- outdoor,
- smart homes.

Our goal is to offer high-quality, innovative LED luminaires that meet all standards, are easy to install and save not only installation time but also money. Depending on our customer and his needs, we are constantly looking for innovations and the most modern lighting solutions, so we add new products to the range every year.


We are the first in Lithuania who offer customers quickly and conveniently calculate the required lighting using a lighting calculator created by us.

For those who want intelligence and even more convenience, we offer LED luminaires controlled by a remote control – adjusting the light spectrum (Kelvin) and the lighting intensity. Also, we can offer LED luminaires with 0-10V or TRIAC intensity control, artificial lighting system – DALI. In our range, we also have luminaires for projects with emergency lighting power supplies for the offices and warehouses or industrial premises.


Customer needs are our concern.




LED LINEAR LIGHT




07 | LOTA100 UGR<19




08 | LOTA100 UGR<19
0-10V DIMMABLE / DALI / SENS




10 | LOTA UGR<19
LOTA UGR<19SENS




12 | LOTA100




13 | LOTA100
0-10V DIMMABLE / DALI / SENS




15 | LOTA
LOTA SENS




18 | LIMAN100




19 | LIMAN100 DIMMABLE
0-10V / TRIAC
LIMAN100 WITH
REMOTE CONTROL




20 | LIMAN100 DALI /
SENSOR / EMERGENCY




22 | LIMAN100
HIGH POWER




23 | LIMAN100 HIGH POWER
0-10V DIMMABLE / SENSOR/
EMERGENCY




24 | LIMAN
LIMAN EMERGENCY




25 | ACCESSORIES




28 | ESNA100



29 | ESNA100 0-10V DIMMABLE /
TRIAC DIMMABLE
ESNA100 WITH REMOTE CONTROL




30 | ESNA100 /
DALI / EMERGENCY



33 | ESNA100 HIGHT POWER



34 | ESNA100 HIGHT POWER
0-10V DIMMABLE / EMERGENCY



35 | ESNA
ESNA EMERGENCY


LED LINEAR LIGHT



TOPE 
LIGHTING



TOPE 
LIGHTING

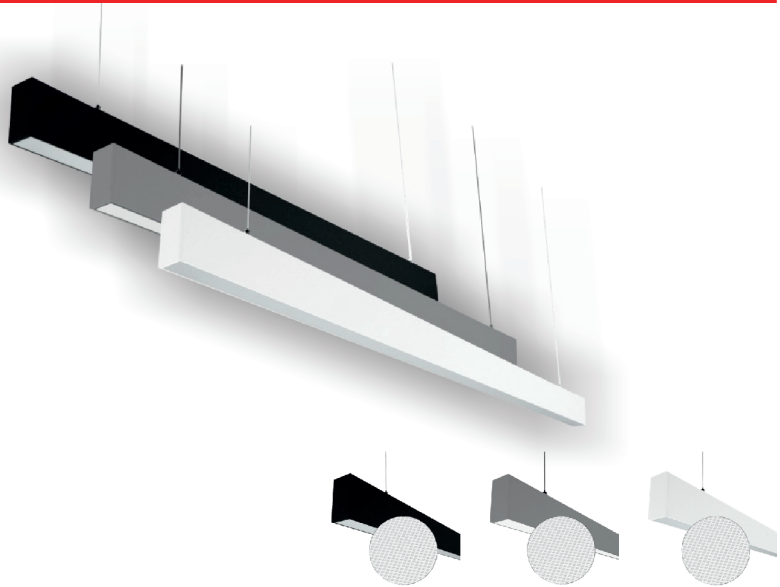

UGR<19

MADE
IN LTU



IP40

IK05

CRI≥80

3000K
6000K



50000 h



WARRANTY

SPECIFICATIONS

- Oblong, linear LED luminaire, hung on cables (max 1m long cables) or attached to the ceiling.
- Constant power electronic power supply.
- Housing: extruded anodized aluminum. End caps: extruded aluminum.
- The luminaire is painted with powder paint. Lens: acrylic.
- Optimal light comfort – UGR < 19.
- Can be produce with 3000K, 4500K or 6000K LED.

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004000096	LOTA100_20W_G_LED_UGR_2000	20W	585x67x35 mm	1700 lm	Grey
6004000097	LOTA100_40W_G_LED_UGR_4000	40 W	1163x67x35 mm	4000 lm	Grey
6004000098	LOTA100_60W_G_LED_UGR_6000	60 W	1745x67x35 mm	5700 lm	Grey
6004000099	LOTA100_80W_G_LED_UGR_8000	80 W	2325x67x35 mm	8000 lm	Grey
6004000100	LOTA100_20W_B_LED_UGR_2000	20W	585x67x35 mm	1700 lm	Black
6004000101	LOTA100_40W_B_LED_UGR_4000	40 W	1163x67x35 mm	4000 lm	Black
6004000102	LOTA100_60W_B_LED_UGR_6000	60 W	1745x67x35 mm	5700 lm	Black
6004000103	LOTA100_80W_B_LED_UGR_8000	80 W	2325x67x35 mm	8000 lm	Black
6004000104	LOTA100_20W_W_LED_UGR_2000	20W	585x67x35 mm	1700 lm	White
6004000105	LOTA100_40W_W_LED_UGR_4000	40 W	1163x67x35 mm	4000 lm	White
6004000106	LOTA100_60W_W_LED_UGR_6000	60 W	1745x67x35 mm	5700 lm	White
6004000107	LOTA100_80W_W_LED_UGR_8000	80 W	2325x67x35 mm	8000 lm	White

LOTA100_UGR<19_0-10V_DIMMABLE

- Dimmable: 0-10V



MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004100097	LOTA100_40W_G_LED_UGR_0-10V	40 W	1163x67x35 mm	4000 lm	Grey
6004100099	LOTA100_80W_G_LED_UGR_0-10V	80 W	2325x67x35 mm	8000 lm	Grey
6004100101	LOTA100_40W_B_LED_UGR_0-10V	40 W	1163x67x35 mm	4000 lm	Black
6004100103	LOTA100_80W_B_LED_UGR_0-10V	80 W	2325x67x35 mm	8000 lm	Black
6004100105	LOTA100_40W_W_LED_UGR_0-10V	40 W	1163x67x35 mm	4000 lm	White
6004100107	LOTA100_80W_W_LED_UGR_0-10V	80 W	2325x67x35 mm	8000 lm	White

LOTA100_UGR<19_DALI

- With DALI



MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004400097	LOTA100_40W_G_LED_UGR_DALI	40 W	1163x67x35 mm	4000 lm	Grey
6004400099	LOTA100_80W_G_LED_UGR_DALI	80 W	2325x67x35 mm	8000 lm	Grey
6004400101	LOTA100_40W_B_LED_UGR_DALI	40 W	1163x67x35 mm	4000 lm	Black
6004400103	LOTA100_80W_B_LED_UGR_DALI	80 W	2325x67x35 mm	8000 lm	Black
6004400105	LOTA100_40W_W_LED_UGR_DALI	40 W	1163x67x35 mm	4000 lm	White
6004400107	LOTA100_80W_W_LED_UGR_DALI	80 W	2325x67x35 mm	8000 lm	White

LOTA100_UGR<19_SENS

- Completed with motion sensor.




MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004700096	LOTA100_20W_G_LED_UGR_SENS	20W	585x67x35 mm	1700 lm	Grey
6004700097	LOTA100_40W_G_LED_UGR_SENS	40 W	1163x67x35 mm	4000 lm	Grey
6004700098	LOTA100_60W_G_LED_UGR_SENS	60 W	1745x67x35 mm	5700 lm	Grey
6004700099	LOTA100_80W_G_LED_UGR_SENS	80 W	2325x67x35 mm	8000 lm	Grey
6004700100	LOTA100_20W_B_LED_UGR_SENS	20W	585x67x35 mm	1700 lm	Black
6004700101	LOTA100_40W_B_LED_UGR_SENS	40 W	1163x67x35 mm	4000 lm	Black
6004700102	LOTA100_60W_B_LED_UGR_SENS	60 W	1745x67x35 mm	5700 lm	Black
6004700103	LOTA100_80W_B_LED_UGR_SENS	80 W	2325x67x35 mm	8000 lm	Black
6004700104	LOTA100_20W_W_LED_UGR_SENS	20W	585x67x35 mm	1700 lm	White
6004700105	LOTA100_40W_W_LED_UGR_SENS	40 W	1163x67x35 mm	4000 lm	White
6004700106	LOTA100_60W_W_LED_UGR_SENS	60 W	1745x67x35 mm	5700 lm	White
6004700107	LOTA100_80W_W_LED_UGR_SENS	80 W	2325x67x35 mm	8000 lm	White



TOPE 
LIGHTING

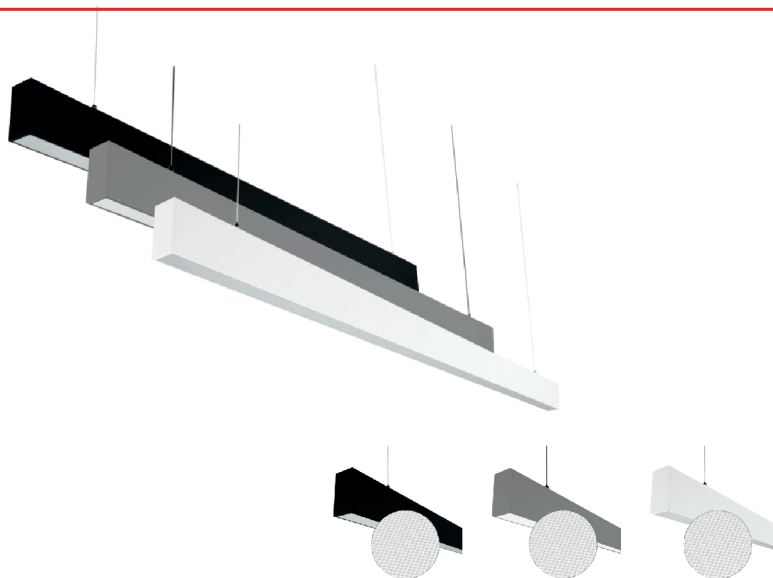

MADE
IN LTU

IP40

IK05

CRI≥80

4000K

30000 h

3
WARRANTY

SPECIFICATIONS


- Oblong, linear LED luminaire, hung on cables (max 1m long cables) or attached to the ceiling.
- Constant power electronic power supply.
- Housing: extruded anodized aluminum. End caps: extruded aluminum.
- The luminaire is painted with powder paint. Lens: acrylic.
- Optimal light comfort – UGR < 19.
- Can be produce with 4000K LED.

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004000108	LOTA_20W_G_LED_UGR_1800	20W	550x67x35 mm	1678 lm	Grey
6004000109	LOTA_40W_G_LED_UGR_3600	40 W	1163x67x35 mm	3011lm	Grey
6004000110	LOTA_54W_G_LED_UGR_5000	54 W	1705x67x35 mm	4689 lm	Grey
6004000111	LOTA_72W_G_LED_UGR_6800	72 W	2315x67x35 mm	6022 lm	Grey
6004000112	LOTA_20W_B_LED_UGR_1800	20W	550x67x35 mm	1678 lm	Black
6004000113	LOTA_40W_B_LED_UGR_3600	40 W	1163x67x35 mm	3011 lm	Black
6004000114	LOTA_54W_B_LED_UGR_5000	54 W	1705x67x35 mm	4689 lm	Black
6004000115	LOTA_72W_B_LED_UGR_6800	72 W	2315x67x35 mm	6022 lm	Black
6004000116	LOTA_20W_W_LED_UGR_1800	20W	550x67x35 mm	1678 lm	White
6004000117	LOTA_40W_W_LED_UGR_3600	40 W	1163x67x35 mm	3011 lm	White
6004000118	LOTA_54W_W_LED_UGR_5000	54 W	1705x67x35 mm	4689 lm	White
6004000119	LOTA_72W_W_LED_UGR_6800	72 W	2315x67x35 mm	6022 lm	White



TOPE+
LIGHTING—

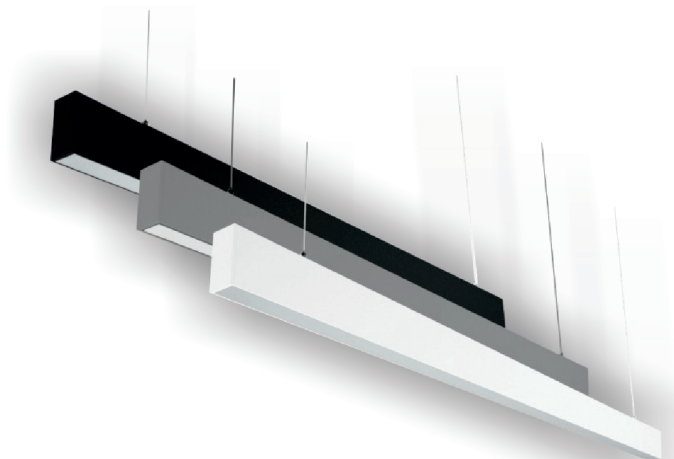

MADE
IN LTU

IP40

IK05

CRI≥80

3000K
6000K

50000 h

5
WARRANTY

SPECIFICATIONS

- Oblong, linear LED luminaire, hung on cables (max 1m long cables) or attached to the ceiling.
- Constant power electronic power supply.
- Housing: extruded anodized aluminum. End caps: extruded aluminum.
- The luminaire is painted with powder paint. Lens: acrylic.
- Can be produce with 3000K, 4500K or 6000K LED.

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004000120	LOTA100_20W_G_LED_2000	20 W	585x67x35 mm	1700 lm	Grey
6004000121	LOTA100_40W_G_LED_4000	40 W	1163x67x35 mm	4000 lm	Grey
6004000122	LOTA100_60W_G_LED_6000	60 W	1745x67x35 mm	5700 lm	Grey
6004000123	LOTA100_80W_G_LED_8000	80 W	2325x67x35 mm	8000 lm	Grey
6004000124	LOTA100_20W_B_LED_2000	20 W	585x67x35 mm	1700 lm	Black
6004000125	LOTA100_40W_B_LED_4000	40 W	1163x67x35 mm	4000 lm	Black
6004000126	LOTA100_60W_B_LED_6000	60 W	1745x67x35 mm	5700 lm	Black
6004000127	LOTA100_80W_B_LED_8000	80 W	2325x67x35 mm	8000 lm	Black
6004000128	LOTA100_20W_W_LED_2000	20W	585x67x35 mm	1700 lm	White
6004000129	LOTA100_40W_W_LED_4000	40 W	1163x67x35 mm	4000 lm	White
6004000130	LOTA100_60W_W_LED_6000	60 W	1745x67x35 mm	5700 lm	White
6004000131	LOTA100_80W_W_LED_8000	80 W	2325x67x35 mm	8000 lm	White

LOTA100_0-10V_DIMMABLE

- Dimmable: 0-10V



MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004100121	LOTA100_40W_G_LED_0-10V	40 W	1163x67x35 mm	4000 lm	Grey
6004100123	LOTA100_80W_G_LED_0-10V	80 W	2325x67x35 mm	8000 lm	Grey
6004100125	LOTA100_40W_B_LED_0-10V	40 W	1163x67x35 mm	4000 lm	Black
6004100127	LOTA100_80W_B_LED_0-10V	80 W	2325x67x35 mm	8000 lm	Black
6004100129	LOTA100_40W_W_LED_0-10V	40 W	1163x67x35 mm	4000 lm	White
6004100131	LOTA100_80W_W_LED_0-10V	80 W	2325x67x35 mm	8000 lm	White

LOTA100_DALI

- With DALI



MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004400121	LOTA100_40W_G_LED_DALI	40 W	1163x67x35 mm	4000 lm	Grey
6004400123	LOTA100_80W_G_LED_DALI	80 W	2325x67x35 mm	8000 lm	Grey
6004400125	LOTA100_40W_B_LED_DALI	40 W	1163x67x35 mm	4000 lm	Black
6004400127	LOTA100_80W_B_LED_DALI	80 W	2325x67x35 mm	8000 lm	Black
6004400129	LOTA100_40W_W_LED_DALI	40 W	1163x67x35 mm	4000 lm	White
6004400131	LOTA100_80W_W_LED_DALI	80 W	2325x67x35 mm	8000 lm	White

LOTA100_SENS

- Completed with motion sensor.




MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004700120	LOTA100_20W_G_LED_SENS	20W	585x67x35 mm	1700 lm	Grey
6004700121	LOTA100_40W_G_LED_SENS	40 W	1163x67x35 mm	4000 lm	Grey
6004700122	LOTA100_60W_G_LED_SENS	60 W	1745x67x35 mm	5700 lm	Grey
6004700123	LOTA100_80W_G_LED_SENS	80 W	2325x67x35 mm	8000 lm	Grey
6004700124	LOTA100_20W_B_LED_SENS	20W	585x67x35 mm	1700 lm	Black
6004700125	LOTA100_40W_B_LED_SENS	40 W	1163x67x35 mm	4000 lm	Black
6004700126	LOTA100_60W_B_LED_SENS	60 W	1745x67x35 mm	5700 lm	Black
6004700127	LOTA100_80W_B_LED_SENS	80 W	2325x67x35 mm	8000 lm	Black
6004700128	LOTA100_20W_W_LED_SENS	20W	585x67x35 mm	1700 lm	White
6004700129	LOTA100_40W_W_LED_SENS	40 W	1163x67x35 mm	4000 lm	White
6004700130	LOTA100_60W_W_LED_SENS	60 W	1745x67x35 mm	5700 lm	White
6004700131	LOTA100_80W_W_LED_SENS	80 W	2325x67x35 mm	8000 lm	White



TOPE 
LIGHTING

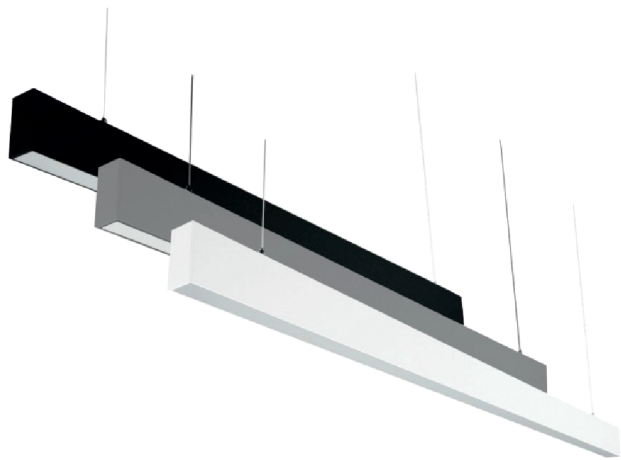

MADE
IN LTU

IP40

IK05

CRI \geq 80

4000K

30000 h

3
WARRANTY

SPECIFICATIONS

- Oblong, linear LED luminaire, hung on cables (max 1m long cables) or attached to the ceiling.
- Constant power electronic power supply.
- Housing: extruded anodized aluminum. End caps: extruded aluminum.
- The luminaire is painted with powder paint. Lens: acrylic.
- Can be produce with 4000K LED.

MODELS


CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004000132	LOTA_20W_G_LED_1800	20W	550x67x35 mm	1678lm	Grey
6004000133	LOTA_40W_G_LED_3600	40 W	1163x67x35 mm	3011lm	Grey
6004000134	LOTA_54W_G_LED_5000	54W	1705x67x35 mm	4689lm	Grey
6004000135	LOTA_72W_G_LED_6800	72W	2315x67x35 mm	6022lm	Grey
6004000136	LOTA_20W_B_LED_1800	20W	550x67x35 mm	1678lm	Black
6004000137	LOTA_40W_B_LED_3600	40 W	1163x67x35 mm	3011lm	Black
6004000138	LOTA_54W_B_LED_5000	54W	1705x67x35 mm	4689lm	Black
6004000139	LOTA_72W_B_LED_6800	72W	2315x67x35 mm	6022lm	Black
6004000140	LOTA_20W_W_LED_1800	20W	550x67x35 mm	1678lm	White
6004000141	LOTA_40W_W_LED_3600	40 W	1163x67x35 mm	3011lm	White
6004000142	LOTA_54W_W_LED_5000	54W	1705x67x35 mm	4689lm	White
6004000143	LOTA_72W_W_LED_6800	72W	2315x67x35 mm	6022lm	White



TOPE &
LIGHTING



TOPE⁺
LIGHTING_—

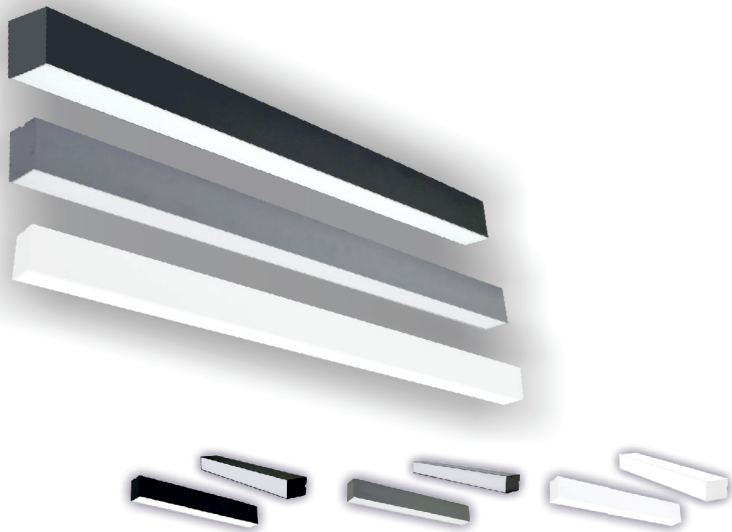MADE
IN LTU


IP40

IK05

CRI≥80

3000K
6000K


50000 h



WARRANTY

SPECIFICATIONS

- Oblong, linear LED luminaire, hung on cables (max 1m long cables) or attached to the ceiling.
- Constant power electronic power supply.
- Housing: extruded anodized aluminum. End caps: extruded aluminum.
- The luminaire is painted with powder paint. Lens: acrylic.
- Can be produce with 3000K, 4500K or 6000K.

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004000059	LIMAN100_20W_G_LED_2000 CCT	20W	585x55x75 mm	1700 lm	Grey
6004000060	LIMAN100_40W_G_LED_4000 CCT	40 W	1163x55x75 mm	4000 lm	Grey
6004000061	LIMAN100_60W_G_LED_6000 CCT	60 W	1745x55x75 mm	5700 lm	Grey
6004000062	LIMAN100_80W_G_LED_8000 CCT	80 W	2325x55x75 mm	8000 lm	Grey
6004000063	LIMAN100_20W_B_LED_2000 CCT	20W	585x55x75 mm	1700 lm	Black
6004000064	LIMAN100_40W_B_LED_4000 CCT	40 W	1163x55x75 mm	4000 lm	Black
6004000065	LIMAN100_60W_B_LED_6000 CCT	60 W	1745x55x75 mm	5700 lm	Black
6004000066	LIMAN100_80W_B_LED_8000 CCT	80 W	2325x55x75 mm	8000 lm	Black
6004000067	LIMAN100_20W_W_LED_2000 CCT	20W	585x55x75 mm	1700 lm	White
6004000068	LIMAN100_40W_W_LED_4000 CCT	40 W	1163x55x75 mm	4000 lm	White
6004000069	LIMAN100_60W_W_LED_6000 CCT	60 W	1745x55x75 mm	5700 lm	White
6004000070	LIMAN100_80W_W_LED_8000 CCT	80 W	2325x55x75 mm	8000 lm	White

LIMAN100_0-10V_DIMMABLE

- Dimmable: 0-10V

DIM

MADE
IN LTU

IP40

CRI≥80

3000K
6000K

50000 h

5
WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004100060	LIMAN100_40W_G_LED_4000_CCT_0-10V	40 W	1163x55x75 mm	4000 lm	Grey
6004100062	LIMAN100_80W_G_LED_8000_CCT_0-10V	80 W	2325x55x75 mm	8000 lm	Grey
6004100064	LIMAN100_40W_B_LED_4000_CCT_0-10V	40 W	1163x55x75 mm	4000 lm	Black
6004100066	LIMAN100_80W_B_LED_8000_CCT_0-10V	80 W	2325x55x75 mm	8000 lm	Black
6004100068	LIMAN100_40W_W_LED_4000_CCT_0-10V	40 W	1163x55x75 mm	4000 lm	White
6004100070	LIMAN100_80W_W_LED_8000_CCT_0-10V	80 W	2325x55x75 mm	8000 lm	White

LIMAN100_TRIAC_DIMMABLE

- Dimmable: TRIAC

DIM

MADE
IN LTU

IP40

CRI≥80

3000K
6000K

50000 h

5
WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004300060	LIMAN100_40W_G_LED_4000_CCT_TRIAC	40 W	1163x55x75 mm	4000 lm	Grey
6004300062	LIMAN100_80W_G_LED_8000_CCT_TRIAC	80 W	2325x55x75 mm	8000 lm	Grey
6004300064	LIMAN100_40W_B_LED_4000_CCT_TRIAC	40 W	1163x55x75 mm	4000 lm	Black
6004300066	LIMAN100_80W_B_LED_8000_CCT_TRIAC	80 W	2325x55x75 mm	8000 lm	Black
6004300068	LIMAN100_40W_W_LED_4000_CCT_TRIAC	40 W	1163x55x75 mm	4000 lm	White
6004300070	LIMAN100_80W_W_LED_8000_CCT_TRIAC	80 W	2325x55x75 mm	8000 lm	White

LIMAN100_WITH REMOTE CONTROL

- The luminaire is controlled by a remote control (remote control not included to the set).

REMOTE

DIM

MADE
IN LTU

CRI≥80

3000K
6000K

50000 h

5
WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004600060	LIMAN100_40W_G_LED_4000_CCT_RC	40 W	1163x55x75 mm	4000 lm	Grey
6004600062	LIMAN100_80W_G_LED_8000_CCT_RC	80 W	2325x55x75 mm	8000 lm	Grey
6004600064	LIMAN100_40W_B_LED_4000_CCT_RC	40 W	1163x55x75 mm	4000 lm	Black
6004600066	LIMAN100_80W_B_LED_8000_CCT_RC	80 W	2325x55x75 mm	8000 lm	Black
6004600068	LIMAN100_40W_W_LED_4000_CCT_RC	40 W	1163x55x75 mm	4000 lm	White
6004600070	LIMAN100_80W_W_LED_8000_CCT_RC	80 W	2325x55x75 mm	8000 lm	White
6004610001	LIMAN100_EASY_RF_REMOTE				

LIMAN100_DALI

• Dimmable: DALI

DALI

MADE
IN LTU

IP40

CRI≥80

3000K
6000K

50000 h

5
WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004400060	LIMAN100_40W_G_LED_4000_CCT_DALI	40 W	1163x55x75 mm	4000 lm	Grey
6004400062	LIMAN100_80W_G_LED_8000_CCT_DALI	80 W	2325x55x75 mm	8000 lm	Grey
6004400064	LIMAN100_40W_B_LED_4000_CCT_DALI	40 W	1163x55x75 mm	4000 lm	Black
6004400066	LIMAN100_80W_B_LED_8000_CCT_DALI	80 W	2325x55x75 mm	8000 lm	Black
6004400068	LIMAN100_40W_W_LED_4000_CCT_DALI	40 W	1163x55x75 mm	4000 lm	White
6004400070	LIMAN100_80W_W_LED_8000_CCT_DALI	80 W	2325x55x75 mm	8000 lm	White

LIMAN100_SENSOR

• Completed with motion sensor.

SENSOR

MADE
IN LTU

IP40

CRI≥80

3000K
6000K

50000 h

5
WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004700059	LIMAN100_20W_G_LED_2000_CCT_SENS	20W	585x55x75 mm	1700 lm	Grey
6004700060	LIMAN100_40W_G_LED_4000_CCT_SENS	40 W	1163x55x75 mm	4000 lm	Grey
6004700061	LIMAN100_60W_G_LED_6000_CCT_SENS	60 W	1745x55x75 mm	5700 lm	Grey
6004700062	LIMAN100_80W_G_LED_8000_CCT_SENS	80 W	2325x55x75 mm	8000 lm	Grey
6004700063	LIMAN100_20W_B_LED_2000_CCT_SENS	20W	585x55x75 mm	1700 lm	Black
6004700064	LIMAN100_40W_B_LED_4000_CCT_SENS	40 W	1163x55x75 mm	4000 lm	Black
6004700065	LIMAN100_60W_B_LED_6000_CCT_SENS	60 W	1745x55x75 mm	5700 lm	Black
6004700066	LIMAN100_80W_B_LED_8000_CCT_SENS	80 W	2325x55x75 mm	8000 lm	Black
6004700067	LIMAN100_20W_W_LED_2000_CCT_SENS	20W	585x55x75 mm	1700 lm	White
6004700068	LIMAN100_40W_W_LED_4000_CCT_SENS	40 W	1163x55x75 mm	4000 lm	White
6004700069	LIMAN100_60W_W_LED_6000_CCT_SENS	60 W	1745x55x75 mm	5700 lm	White
6004700070	LIMAN100_80W_W_LED_8000_CCT_SENS	80 W	2325x55x75 mm	8000 lm	White

LIMAN100_EMERGENCY

• Completed with emergency block (2h).

MADE
IN LTU

IP40

CRI≥80

3000K
6000K

50000 h


2
WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	EM. LUMENS	WORKING TIME	HOUSING COLOR
6004200059	LIMAN100_20W_G_LED_2000_CCT_EM	20W	585x55x75 mm	1700 lm	max 387,96 lm	2h	Grey
6004200060	LIMAN100_40W_G_LED_4000_CCT_EM	40 W	1163x55x75 mm	4000 lm	max 387,96 lm	2h	Grey
6004200061	LIMAN100_60W_G_LED_6000_CCT_EM	60 W	1745x55x75 mm	5700 lm	max 387,96 lm	2h	Grey
6004200062	LIMAN100_80W_G_LED_8000_CCT_EM	80 W	2325x55x75 mm	8000 lm	max 387,96 lm	2h	Grey
6004200063	LIMAN100_20W_B_LED_2000_CCT_EM	20W	585x55x75 mm	1700 lm	max 387,96 lm	2h	Black
6004200064	LIMAN100_40W_B_LED_4000_CCT_EM	40 W	1163x55x75 mm	4000 lm	max 387,96 lm	2h	Black
6004200065	LIMAN100_60W_B_LED_6000_CCT_EM	60 W	1745x55x75 mm	5700 lm	max 387,96 lm	2h	Black
6004200066	LIMAN100_80W_B_LED_8000_CCT_EM	80 W	2325x55x75 mm	8000 lm	max 387,96 lm	2h	Black
6004200067	LIMAN100_20W_W_LED_2000_CCT_EM	20W	585x55x75 mm	1700 lm	max 387,96 lm	2h	White
6004200068	LIMAN100_40W_W_LED_4000_CCT_EM	40 W	1163x55x75 mm	4000 lm	max 387,96 lm	2h	White
6004200069	LIMAN100_60W_W_LED_6000_CCT_EM	60 W	1745x55x75 mm	5700 lm	max 387,96 lm	2h	White
6004200070	LIMAN100_80W_W_LED_8000_CCT_EM	80 W	2325x55x75 mm	8000 lm	max 387,96 lm	2h	White



TOPE 
LIGHTING

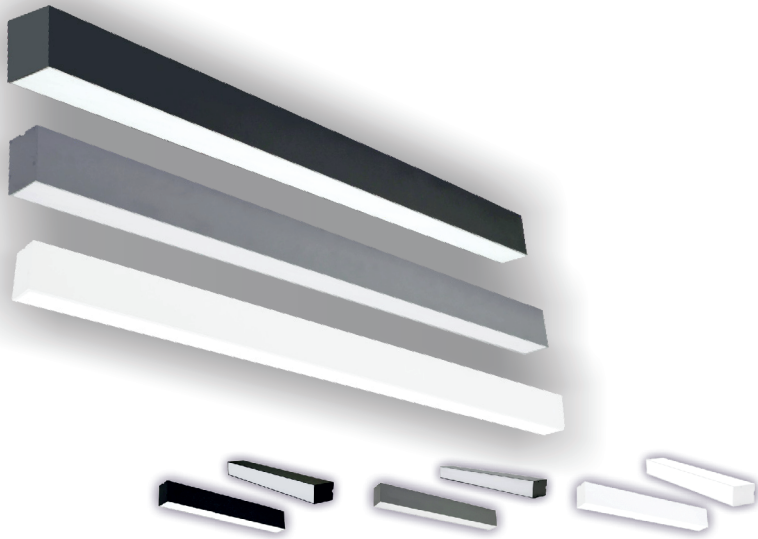

MADE
IN LTU

IP40

IK05

CRI≥80

3000K
6000K

50000 h

5
WARRANTY

SPECIFICATIONS

- Oblong, linear LED luminaire, hung on cables (max 1m long cables) or attached to the ceiling.
- Constant power electronic power supply.
- Housing: extruded anodized aluminum. End caps: extruded aluminum.
- The luminaire is painted with powder paint. Lens: acrylic.
- Can be produce with 3000K, 4500K or 6000K.

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004500059	LIMAN100_40W_G_LED_4000_CCT_HP	40 W	585x55x75 mm	3400 lm	Grey
6004500060	LIMAN100_80W_G_LED_8000_CCT_HP	80 W	1163x55x75 mm	8000 lm	Grey
6004500061	LIMAN100_120W_G_LED_12000_CCT_HP	120W	1745x55x75 mm	11400 lm	Grey
6004500062	LIMAN100_160W_G_LED_16000_CCT_HP	160W	2325x55x75 mm	16000 lm	Grey
6004500063	LIMAN100_40W_B_LED_4000_CCT_HP	40 W	585x55x75 mm	3400 lm	Black
6004500064	LIMAN100_80W_B_LED_8000_CCT_HP	80 W	1163x55x75 mm	8000 lm	Black
6004500065	LIMAN100_120W_B_LED_12000_CCT_HP	120W	1745x55x75 mm	11400 lm	Black
6004500066	LIMAN100_160W_B_LED_16000_CCT_HP	160W	2325x55x75 mm	16000 lm	Black
6004500067	LIMAN100_40W_W_LED_4000_CCT_HP	40 W	585x55x75 mm	3400 lm	White
6004500068	LIMAN100_80W_W_LED_8000_CCT_HP	80 W	1163x55x75 mm	8000 lm	White
6004500069	LIMAN100_120W_W_LED_12000_CCT_HP	120 W	1745x55x75 mm	11400 lm	White
6004500070	LIMAN100_160W_W_LED_16000_CCT_HP	160W	2325x55x75 mm	16000 lm	White

LIMAN100_HIGH POWER_0-10V_DIMMABLE

- Dimmable: 0-10V

DIM

MADE
IN
LTU

IK05

CRI≥80

3000K
6000K

50000 h

WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004510060	LIMAN100_80W_G_LED_8000_CCT_HP_0-10V	80 W	1163x55x75 mm	8000 lm	Grey
6004510062	LIMAN100_160W_G_LED_16000_CCT_HP_0-10V	160W	2325x55x75 mm	16000 lm	Grey
6004510064	LIMAN100_80W_B_LED_8000_CCT_HP_0-10V	80 W	1163x55x75 mm	8000 lm	Black
6004510066	LIMAN100_160W_B_LED_16000_CCT_HP_0-10V	160W	2325x55x75 mm	16000 lm	Black
6004510068	LIMAN100_80W_W_LED_8000_CCT_HP_0-10V	80 W	1163x55x75 mm	8000 lm	White
6004510070	LIMAN100_160W_W_LED_16000_CCT_HP_0-10V	160W	2325x55x75 mm	16000 lm	White

LIMAN100_HIGH POWER_SENSOR

- Completed with motion sensor.

SENSOR

MADE
IN
LTU

IP40

CRI≥80

3000K
6000K

50000 h

WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004570059	LIMAN100_40W_G_LED_4000_CCT_HP	40 W	585x55x75 mm	3400 lm	Grey
6004570060	LIMAN100_80W_G_LED_8000_CCT_HP	80 W	1163x55x75 mm	8000 lm	Grey
6004570061	LIMAN100_120W_G_LED_12000_CCT_HP	120W	1745x55x75 mm	11400 lm	Grey
6004570062	LIMAN100_160W_G_LED_16000_CCT_HP	160W	2325x55x75 mm	16000 lm	Grey
6004570063	LIMAN100_40W_B_LED_4000_CCT_HP	40 W	585x55x75 mm	3400 lm	Black
6004570064	LIMAN100_80W_B_LED_8000_CCT_HP	80 W	1163x55x75 mm	8000 lm	Black
6004570065	LIMAN100_120W_B_LED_12000_CCT_HP	120W	1745x55x75 mm	11400 lm	Black
6004570066	LIMAN100_160W_B_LED_16000_CCT_HP	160W	2325x55x75 mm	16000 lm	Black
6004570067	LIMAN100_40W_W_LED_4000_CCT_HP	40 W	585x55x75 mm	3400 lm	White
6004570068	LIMAN100_80W_W_LED_8000_CCT_HP	80 W	1163x55x75 mm	8000 lm	White
6004570069	LIMAN100_120W_W_LED_12000_CCT_HP	120 W	1745x55x75 mm	11400 lm	White
6004570070	LIMAN100_160W_W_LED_16000_CCT_HP	160W	2325x55x75 mm	16000 lm	White

LIMAN100_HIGH POWER_EMERGENCY

- Completed with emergency block (2h).

EMERGENCY

MADE
IN
LTU

IP40

CRI≥80

3000K
6000K

50000 h

WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	EM. LUMENS	EM. WORKING TIME	HOUSING COLOR
6004520059	LIMAN100_40W_G_LED_4000_CCT_HP_EM	40 W	585x55x75 mm	3400 lm	max 387,96 lm	2h	Grey
6004520060	LIMAN100_80W_G_LED_8000_CCT_HP_EM	80 W	1163x55x75 mm	8000 lm	max 387,96 lm	2h	Grey
6004520061	LIMAN100_120W_G_LED_12000_CCT_HP_EM	120 W	1745x55x75 mm	11400 lm	max 387,96 lm	2h	Grey
6004520062	LIMAN100_160W_G_LED_16000_CCT_HP_EM	160W	2325x55x75 mm	16000 lm	max 387,96 lm	2h	Grey
6004520063	LIMAN100_40W_B_LED_4000_CCT_HP_EM	40 W	585x55x75 mm	3400 lm	max 387,96 lm	2h	Black
6004520064	LIMAN100_80W_B_LED_8000_CCT_HP_EM	80 W	1163x55x75 mm	8000 lm	max 387,96 lm	2h	Black
6004520065	LIMAN100_120W_B_LED_12000_CCT_HP_EM	120 W	1745x55x75 mm	11400 lm	max 387,96 lm	2h	Black
6004520066	LIMAN100_160W_B_LED_16000_CCT_HP_EM	160W	2325x55x75 mm	16000 lm	max 387,96 lm	2h	Black
6004520067	LIMAN100_40W_W_LED_4000_CCT_HP_EM	40 W	585x55x75 mm	3400 lm	max 387,96 lm	2h	White
6004520068	LIMAN100_80W_W_LED_8000_CCT_HP_EM	80 W	1163x55x75 mm	8000 lm	max 387,96 lm	2h	White
6004520069	LIMAN100_120W_W_LED_12000_CCT_HP_EM	120 W	1745x55x75 mm	11400 lm	max 387,96 lm	2h	White
6004520070	LIMAN100_160W_W_LED_16000_CCT_HP_EM	160W	2325x55x75 mm	16000 lm	max 387,96 lm	2h	White



SPECIFICATIONS

- Oblong, linear LED luminaire, hung on cables (max 1m long cables) or attached to the ceiling.
- Constant power electronic power supply.
- Housing: extruded anodized aluminum. End caps: extruded aluminum.
- The luminaire is painted with powder paint. Lens: acrylic.
- Complete with 4000K

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6004000035	LIMAN100_20W_G_LED_1800	20W	550x55x75 mm	1678 lm	Grey
6004000036	LIMAN100_40W_G_LED_3600	40W	1163x55x75 mm	3011 lm	Grey
6004000037	LIMAN100_54W_G_LED_5000	54 W	1705x55x75 mm	4689 lm	Grey
6004000038	LIMAN100_72W_G_LED_6800	72W	2315x55x75 mm	6022 lm	Grey
6004000039	LIMAN100_20W_B_LED_1800	20W	550x55x75 mm	1678 lm	Black
6004000040	LIMAN100_40W_B_LED_3600	40W	1163x55x75 mm	3011 lm	Black
6004000041	LIMAN100_54W_B_LED_5000	54 W	1705x55x75 mm	4689 lm	Black
6004000042	LIMAN100_72W_B_LED_6800	72W	2315x55x75 mm	6022 lm	Black
6004000043	LIMAN100_20W_W_LED_1800	20W	550x55x75 mm	1678 lm	White
6004000044	LIMAN100_40W_W_LED_3600	40W	1163x55x75 mm	3011 lm	White
6004000045	LIMAN100_54W_W_LED_5000	54 W	1705x55x75 mm	4689 lm	White
6004000046	LIMAN100_72W_W_LED_6800	72W	2315x55x75 mm	6022 lm	White

LIMAN_EMERGENCY

- Completed with emergency block (2h).




MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	EM. LUMENS	EM. WORKING TIME	HOUSING COLOR
6004200035	LIMAN100_20W_G_LED_1800EM	20 W	550x55x75 mm	1678 lm	max 364,96 lm	2h	Grey
6004200036	LIMAN100_40W_G_LED_3600_EM	40W	1163x55x75 mm	3011 lm	max 364,96 lm	2h	Grey
6004200037	LIMAN100_54W_G_LED_5000_EM	54 W	1705x55x75 mm	4689 lm	max 364,96 lm	2h	Grey
6004200038	LIMAN100_72W_G_LED_6800_EM	72W	2315x55x75 mm	6022 lm	max 364,96 lm	2h	Grey
6004200039	LIMAN100_20W_B_LED_1800_EM	20 W	550x55x75 mm	1678 lm	max 364,96 lm	2h	Black
6004200040	LIMAN100_40W_B_LED_3600_EM	40W	1163x55x75 mm	3011 lm	max 364,96 lm	2h	Black
6004200041	LIMAN100_54W_B_LED_5000_EM	54 W	1705x55x75 mm	4689 lm	max 364,96 lm	2h	Black
6004200042	LIMAN100_72W_B_LED_6800_EM	72W	2315x55x75 mm	6022 lm	max 364,96 lm	2h	Black
6004200043	LIMAN100_20W_W_LED_1800_EM	20 W	550x55x75 mm	1678 lm	max 364,96 lm	2h	White
6004200044	LIMAN100_40W_W_LED_3600_EM	40W	1163x55x75 mm	3011 lm	max 364,96 lm	2h	White
6004200045	LIMAN100_54W_W_LED_5000_EM	54 W	1705x55x75 mm	4689 lm	max 364,96 lm	2h	White
6004200046	LIMAN100_72W_W_LED_6800_EM	72W	2315x55x75 mm	6022 lm	max 364,96 lm	2h	White




TOPE 
LIGHTING 

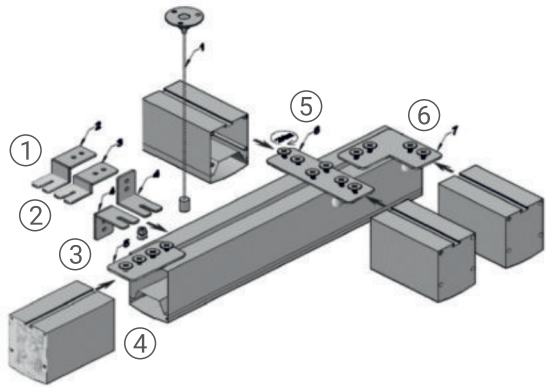

CODE	NAME
① 6004300001	MOUNTING THE LUMINAIRE 22mm FROM THE CEILING
② 6004300002	MOUNTING THE LUMINAIRE 14mm FROM THE CEILING
③ 6004300003	MOUNTING THE LUMINAIRE ON THE WALL
④ 6004300004	COMBINATION OF THE SEVERAL LUMINAIRES
⑤ 6004300005	COMBINATIO OF THE LUMINAIRES 2x90°
⑥ 6004300006	COMBINATION OF THE LUMINAIRES 90°



TOPE 
LIGHTING 

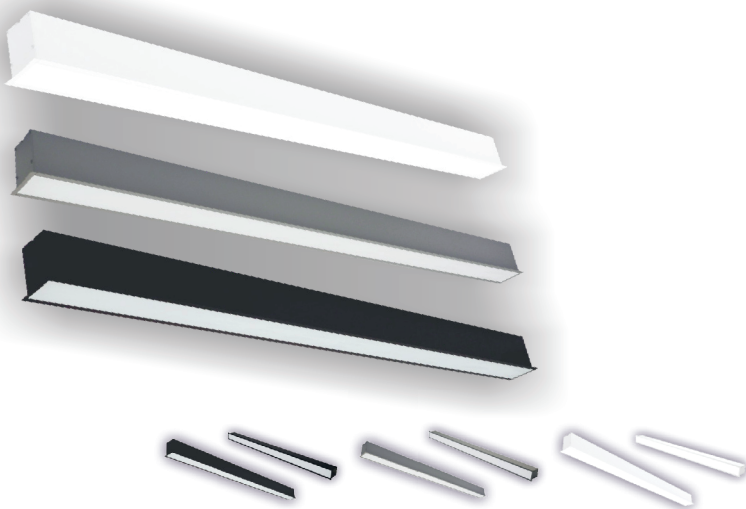MADE
IN LTU


IP40

IK05

CRI≥80

3000K
6000K


50000 h



WARRANTY

SPECIFICATIONS

- Single length recessed suspended individual direct LED luminaire, with a seamless rectangular shape.
- Electronic, fixed output gear. Class I electrical, IP40.
- Body: extruded anodised Aluminum. End caps: die-cast aluminum, powder coated white, black or grey. Possibility to choose other color.
- Diffuser: acrylic. Supplied with adjustable wire suspension mounting.
- Can be produce with 3000K, 4500K or 6000K.

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6003000064	ESNA100_20W_G_LED_2000_CCT	20W	599x71x75 mm	1700 lm	Grey
6003000065	ESNA100_40W_G_LED_4000_CCT	40 W	1174x71x75 mm	4000 lm	Grey
6003000066	ESNA100_60W_G_LED_6000_CCT	60 W	1759x71x75 mm	5700 lm	Grey
6003000067	ESNA100_80W_G_LED_8000_CCT	80 W	2339x71x75 mm	8000 lm	Grey
6003000068	ESNA100_20W_B_LED_2000_CCT	20W	599x71x75 mm	1700 lm	Black
6003000069	ESNA100_40W_B_LED_4000_CCT	40 W	1174x71x75 mm	4000 lm	Black
6003000070	ESNA100_60W_B_LED_6000_CCT	60 W	1759x71x75 mm	5700 lm	Black
6003000071	ESNA100_80W_B_LED_8000_CCT	80 W	2339x71x75 mm	8000 lm	Black
6003000072	ESNA100_20W_W_LED_2000_CCT	20W	599x71x75 mm	1700 lm	White
6003000073	ESNA100_40W_W_LED_4000_CCT	40 W	1174x71x75 mm	4000 lm	White
6003000074	ESNA100_60W_W_LED_6000_CCT	60 W	1759x71x75 mm	5700 lm	White
6003000075	ESNA100_80W_W_LED_8000_CCT	80 W	2339x71x75 mm	8000 lm	White

ESNA100_0-10V_DIMMABLE

• Dimmable: 0-10V



MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6003100065	ESNA100_40W_G_LED_4000_CCT_0-10V	40 W	1174x71x75 mm	4000 lm	Grey
6003100067	ESNA100_80W_G_LED_8000_CCT_0-10V	80 W	2339x71x75 mm	8000 lm	Grey
6003100069	ESNA100_40W_B_LED_4000_CCT_0-10V	40 W	1174x71x75 mm	4000 lm	Black
6003100071	ESNA100_80W_B_LED_8000_CCT_0-10V	80 W	2339x71x75 mm	8000 lm	Black
6003100073	ESNA100_40W_W_LED_4000_CCT_0-10V	40 W	1174x71x75 mm	4000 lm	White
6003100075	ESNA100_80W_W_LED_8000_CCT_0-10V	80 W	2339x71x75 mm	8000 lm	White

ESNA100_TRIAC_DIMMABLE

• Dimmable: TRIAC



MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6003300065	ESNA100_40W_G_LED_4000_CCT_TRIAC	40 W	1174x71x75 mm	4000 lm	Grey
6003300067	ESNA100_80W_G_LED_8000_CCT_TRIAC	80 W	2339x71x75 mm	8000 lm	Grey
6003300069	ESNA100_40W_B_LED_4000_CCT_TRIAC	40 W	1174x71x75 mm	4000 lm	Black
6003300071	ESNA100_80W_B_LED_8000_CCT_TRIAC	80 W	2339x71x75 mm	8000 lm	Black
6003300073	ESNA100_40W_W_LED_4000_CCT_TRIAC	40 W	1174x71x75 mm	4000 lm	White
6003300075	ESNA100_80W_W_LED_8000_CCT_TRIAC	80 W	2339x71x75 mm	8000 lm	White

ESNA100_WITH REMOTE CONTROL

• The luminaire is controlled by a remote control (remote control not included to the set).



MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6003600065	ESNA100_40W_G_LED_4000_CCT_RC	40 W	1174x71x75 mm	4000 lm	Grey
6003600067	ESNA100_80W_G_LED_8000_CCT_RC	80 W	2339x71x75 mm	8000 lm	Grey
6003600069	ESNA100_40W_B_LED_4000_CCT_RC	40 W	1174x71x75 mm	4000 lm	Black
6003600071	ESNA100_80W_B_LED_8000_CCT_RC	80 W	2339x71x75 mm	8000 lm	Black
6003600073	ESNA100_40W_W_LED_4000_CCT_RC	40 W	1174x71x75 mm	4000 lm	White
6003600075	ESNA100_80W_W_LED_8000_CCT_RC	80 W	2339x71x75 mm	8000 lm	White

ESNA100_DALI

- Dimmable with remote control (remote control not included to the set).

DALI

MADE
IN LTU

IP40

CRI≥80

3000K
6000K

50000 h

5
WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
3003400065	ESNA100_40W_G_LED_4000_CCT_DALI	40 W	585x71x75 mm	4000 lm	Grey
6003400067	ESNA100_80W_G_LED_8000_CCT_DALI	80 W	2339x71x75 mm	8000 lm	Grey
3003400069	ESNA100_40W_B_LED_4000_CCT_DALI	40 W	585x71x75 mm	4000 lm	Black
6003400071	ESNA100_80W_B_LED_8000_CCT_DALI	80 W	2339x71x75 mm	8000 lm	Black
6003400073	ESNA100_40W_W_LED_4000_CCT_DALI	40 W	585x71x75 mm	4000 lm	White
6003400075	ESNA100_80W_W_LED_8000_CCT_DALI	80 W	2339x71x75 mm	8000 lm	White

ESNA100_EMERGENCY

- Completed with emergency block (2h).



MADE
IN LTU

IP40

CRI≥80

3000K
6000K

50000 h

2
WARRANTY

MODELS


CODE	MODEL	POWER	DIMENSION	LUMEN	EM. LUMENS	EM. WORKING TIME	HOUSING COLOR
6003200064	ESNA100_20W_G_LED_2000_CCT_EM	20 W	599x71x75 mm	1700 lm	max 388 lm	2h	Grey
6003200065	ESNA100_40W_G_LED_4000_CCT_EM	40 W	1174x71x75 mm	4000 lm	max 388 lm	2h	Grey
6003200066	ESNA100_60W_G_LED_6000_CCT_EM	60 W	1795x71x75 mm	5700 lm	max 388 lm	2h	Grey
6003200067	ESNA100_80W_G_LED_8000_CCT_EM	80 W	2339x71x75 mm	8000 lm	max 388 lm	2h	Grey
6003200068	ESNA100_20W_B_LED_2000_CCT_EM	20 W	599x71x75 mm	1700 lm	max 388 lm	2h	Black
6003200069	ESNA100_40W_B_LED_4000_CCT_EM	40 W	1174x71x75 mm	4000 lm	max 388 lm	2h	Black
6003200070	ESNA100_60W_B_LED_6000_CCT_EM	60 W	1759x71x75 mm	5700 lm	max 388 lm	2h	Black
6003200071	ESNA100_80W_B_LED_8000_CCT_EM	80 W	2339x71x75 mm	8000 lm	max 388 lm	2h	Black
6003200072	ESNA100_20W_W_LED_2000_CCT_EM	20 W	599x71x75 mm	1700 lm	max 388 lm	2h	White
6003200073	ESNA100_40W_W_LED_4000_CCT_EM	40 W	1174x71x75 mm	4000 lm	max 388 lm	2h	White
6003200074	ESNA100_60W_W_LED_6000_CCT_EM	60 W	1759x71x75 mm	5700 lm	max 388 lm	2h	White
6003200075	ESNA100_80W_W_LED_8000_CCT_EM	80 W	2339x71x75 mm	8000 lm	max 388 lm	2h	White



TOPE+
LIGHTING-



TOPE 
LIGHTING

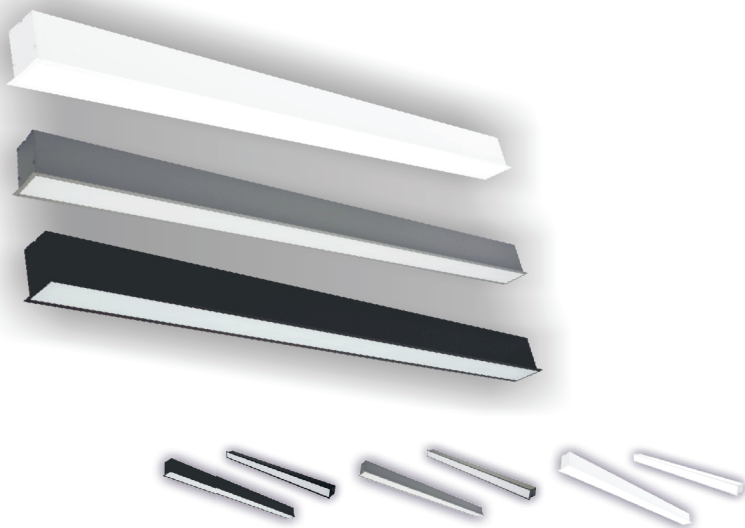

MADE
IN LTU

IP40

IK05

CRI≥80

3000K
6000K

50000 h


5
WARRANTY

SPECIFICATIONS

- Single length recessed suspended individual direct LED luminaire, with a seamless rectangular shape.
- Electronic, fixed output gear. Class I electrical, IP40.
- Body: extruded anodised Aluminum. End caps: die-cast aluminum, powder coated white, black or grey. Possibility to choose other color.
- Diffuser: acrylic. Supplied with adjustable wire suspension mounting.
- Can be produce with 3000K, 4500K or 6000K.

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6003500064	ESNA100_40W_G_LED_4000_CCT_HP	40 W	585x71x75 mm	3400 lm	Grey
6003500065	ESNA100_80W_G_LED_8000_CCT_HP	80 W	1174x71x75 mm	8000 lm	Grey
6003500066	ESNA100_120W_G_LED_12000_CCT_HP	120 W	1759x71x75 mm	11400 lm	Grey
6003500067	ESNA100_160W_G_LED_16000_CCT_HP	160W	2339x71x75 mm	16000 lm	Grey
6003500068	ESNA100_40W_B_LED_4000_CCT_HP	40 W	585x71x75 mm	3400 lm	Black
6003500069	ESNA100_80W_B_LED_8000_CCT_HP	80 W	1174x71x75 mm	8000 lm	Black
6003500070	ESNA100_120W_B_LED_12000_CCT_HP	120W	1795x71x75 mm	11400 lm	Black
6003500071	ESNA100_160W_B_LED_16000_CCT_HP	160W	2339x71x75 mm	16000 lm	Black
6003500072	ESNA100_40W_W_LED_4000_CCT_HP	40 W	585x71x75 mm	3400 lm	White
6003500073	ESNA100_80W_W_LED_8000_CCT_HP	80 W	1174x71x75 mm	8000 lm	White
6003500074	ESNA100_120W_W_LED_12000_CCT_HP	120 W	1759x71x75 mm	11400 lm	White
6003500075	ESNA100_160W_W_LED_16000_CCT_HP	160W	2339x71x75 mm	16000 lm	White

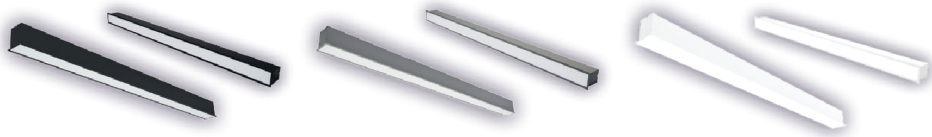

ESNA100_HIGH POWER_0-10V_DIMMABLE

- Dimmable: 0-10V



MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6003510065	ESNA100_80W_G_LED_8000_CCT_HP_0-10V	80 W	1174x71x75 mm	8000 lm	Grey
6003510067	ESNA100_160W_G_LED_16000_CCT_HP_0-10V	160W	2339x71x75 mm	16000 lm	Grey
6003510069	ESNA100_80W_B_LED_8000_CCT_HP_0-10V	80 W	1174x71x75 mm	8000 lm	Black
6003510071	ESNA100_160W_B_LED_16000_CCT_HP_0-10V	160W	2339x71x75 mm	16000 lm	Black
6003510073	ESNA100_80W_W_LED_8000_CCT_HP_0-10V	80 W	1174x71x75 mm	8000 lm	White
6003510075	ESNA100_160W_W_LED_16000_CCT_HP_0-10V	160W	2339x71x75 mm	16000 lm	White


ESNA100_HIGH POWER_EMERGENCY

- Completed with emergency block (2h).



MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	EM. LUMENS	EM. WORKING TIME	HOUSING COLOR
6003520064	ESNA100_40W_G_LED_4000_CCT_HP_EM	40 W	585x71x75 mm	3400 lm	max 388 lm	2h	Grey
6003520065	ESNA100_80W_G_LED_8000_CCT_HP_EM	80 W	1174x71x75 mm	8000 lm	max 388 lm	2h	Grey
6003520066	ESNA100_120W_G_LED_12000_CCT_HP_EM	120 W	1759x71x75 mm	11400 lm	max 388 lm	2h	Grey
6003520067	ESNA100_160W_G_LED_16000_CCT_HP_EM	160W	2339x71x75 mm	16000 lm	max 388 lm	2h	Grey
6003520068	ESNA100_40W_B_LED_4000_CCT_HP_EM	40 W	585x71x75 mm	3400 lm	max 388 lm	2h	Black
6003520069	ESNA100_80W_B_LED_8000_CCT_HP_EM	80 W	1174x71x75 mm	8000 lm	max 388 lm	2h	Black
6003520070	ESNA100_120W_B_LED_12000_CCT_HP_EM	120 W	1759x71x75 mm	11400 lm	max 388 lm	2h	Black
6003520071	ESNA100_160W_B_LED_16000_CCT_HP_EM	160W	2339x71x75 mm	16000 lm	max 388 lm	2h	Black
6003520072	ESNA100_40W_W_LED_4000_CCT_HP_EM	40 W	585x71x75 mm	3400 lm	max 388 lm	2h	White
6003520073	ESNA100_80W_W_LED_8000_CCT_HP_EM	80 W	1174x71x75 mm	8000 lm	max 388 lm	2h	White
6003520074	ESNA100_120W_W_LED_12000_CCT_HP_EM	120 W	1759x71x75 mm	11400 lm	max 388 lm	2h	White
6003520075	ESNA100_160W_W_LED_16000_CCT_HP_EM	160W	2339x71x75 mm	16000 lm	max 388 lm	2h	White

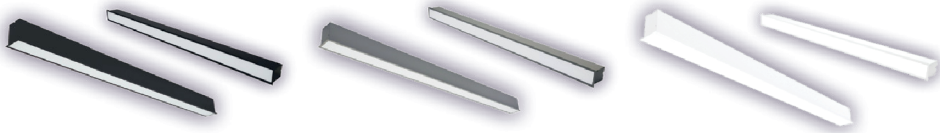

SPECIFICATIONS

- Single length recessed suspended individual direct LED luminaire, with a seamless rectangular shape.
- Electronic, fixed output gear. Class I electrical, IP40.
- Body: extruded anodised Aluminum. End caps: die-cast aluminum, powder coated white, black or grey. Possibility to choose other color.
- Diffuser: acrylic. Supplied with adjustable wire suspension mounting.
- Complete with 4000K LED

MADE
IN LTU

IP40

IK05

CRI≥80



4000K



30000 h



WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	HOUSING COLOR
6003000052	ESNA100_20W_G_LED_1800	20W	575x71x75 mm	1678 lm	Grey
6003000053	ESNA100_40W_G_LED_3600	40W	1178x71x75 mm	3011 lm	Grey
6003000054	ESNA100_54W_G_LED_5000	54 W	1722x71x75 mm	4689 lm	Grey
6003000055	ESNA100_72W_G_LED_6800	72W	2339x71x75 mm	6022 lm	Grey
6003000056	ESNA100_20W_B_LED_1800	20W	575x71x75 mm	1678 lm	Black
6003000057	ESNA100_40W_B_LED_3600	40W	1178x71x75 mm	3011 lm	Black
6003000058	ESNA100_54W_B_LED_5000	54 W	1722x71x75 mm	4689 lm	Black
6003000059	ESNA100_72W_B_LED_6800	72W	2339x71x75 mm	6022 lm	Black
6003000060	ESNA100_20W_W_LED_1800	20W	575x71x75 mm	1678 lm	White
6003000061	ESNA100_40W_W_LED_3600	40W	1178x71x75 mm	3011 lm	White
6003000062	ESNA100_54W_W_LED_5000	54 W	1722x71x75 mm	4689 lm	White
6003000063	ESNA100_72W_W_LED_6800	72W	2339x71x75 mm	6022 lm	White

ESNA_EMERGENCY

- Completed with emergency block (2h).

MADE
IN LTU

IP40

CRI≥80



4000K



30000 h



WARRANTY

MODELS

CODE	MODEL	POWER	DIMENSION	LUMEN	EM. LUMENS	EM. WORKING TIME	HOUSING COLOR
6003200052	ESNA100_20W_G_LED_1800_EM	20 W	575x71x75 mm	1678 lm	max 365 lm	2h	Grey
6003200053	ESNA100_40W_G_LED_3600_EM	40W	1178x71x75 mm	3011 lm	max 365 lm	2h	Grey
6003200054	ESNA100_54W_G_LED_5000_EM	54 W	1722x71x75 mm	4689 lm	max 365 lm	2h	Grey
6003200055	ESNA100_72W_G_LED_6800_EM	72W	2339x71x75 mm	6022 lm	max 365 lm	2h	Grey
6003200056	ESNA100_20W_B_LED_1800_EM	20 W	575x71x75 mm	1678 lm	max 365 lm	2h	Black
6003200057	ESNA100_40W_B_LED_3600_EM	40W	1178x71x75 mm	3011 lm	max 365 lm	2h	Black
6003200058	ESNA100_54W_B_LED_5000_EM	54 W	1722x71x75 mm	4689 lm	max 365 lm	2h	Black
6003200059	ESNA100_72W_B_LED_6800_EM	72W	2339x71x75 mm	6022 lm	max 365 lm	2h	Black
6003200060	ESNA100_20W_W_LED_1800_EM	20 W	575x71x75 mm	1678 lm	max 365 lm	2h	White
6003200061	ESNA100_40W_W_LED_3600_EM	40W	1178x71x75 mm	3011 lm	max 365 lm	2h	White
6003200062	ESNA100_54W_W_LED_5000_EM	54 W	1722x71x75 mm	4689 lm	max 365 lm	2h	White
6003200063	ESNA100_72W_W_LED_6800_EM	72W	2339x71x75 mm	6022 lm	max 365 lm	2h	White



TOPE LIGHTING LITHUANIA

E-Mail Address info@topenerga.lt

Mob.: +370 612 12889

TOPE LIGHTING LATVIA / ESTONIA

E-Mail Address sales.lv@topenerga.lt

Mob.: +371 247 95344

TOPE LIGHTING WORLD WIDE

E-Mail Address sales.lv@topenerga.lt

Mob.: +371 247 95344